

3D planar jet through oscillating bodies at $Re_H = 1000$



The motion of bodies is vertical and forced with a sinusoidal function
Three different frequencies are considered

Author : Y. Fraigneau CNRS-LIMSI (yann.fraigneau@limsi.fr)


Date : April 2019

Simulation type : DNS ([Sunfluidh code](#))

Location : DATABASE_JET_TROUGH_OSCILLATING_BODIES_DNS

Status : Free access

flow through oscillating bodies

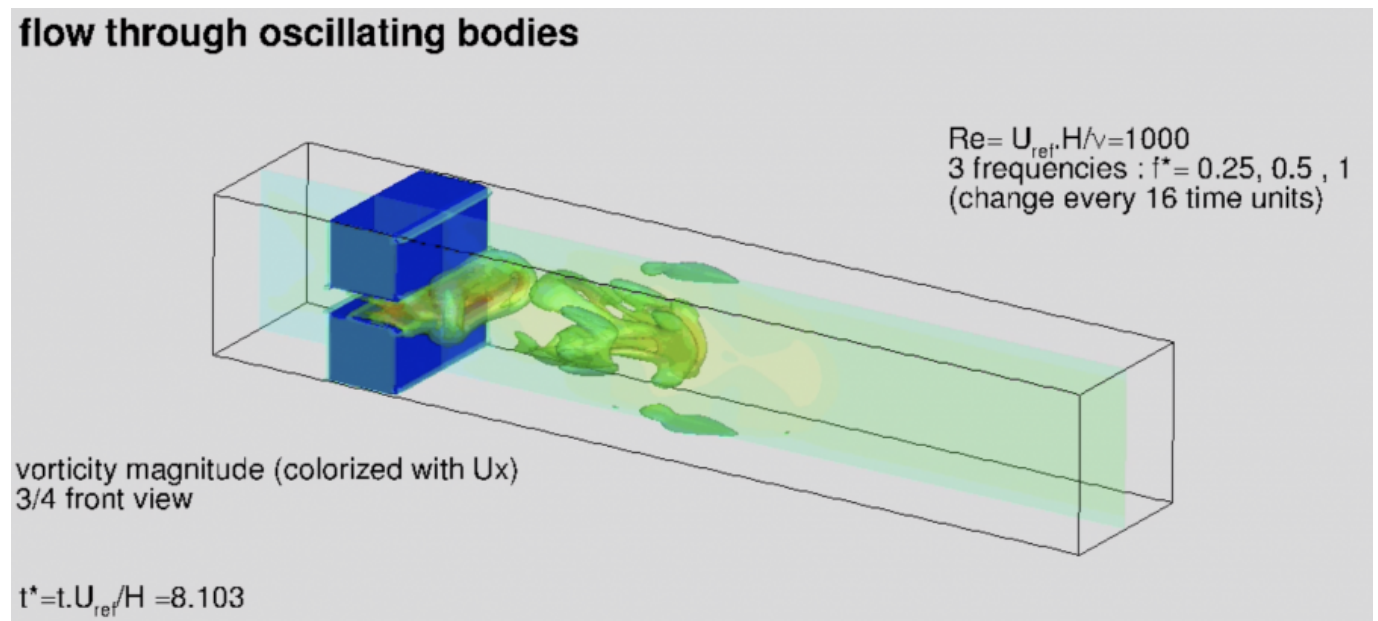


[A video is available here](#)

[Come back to first page](#)

Simulation settings

2D sketch

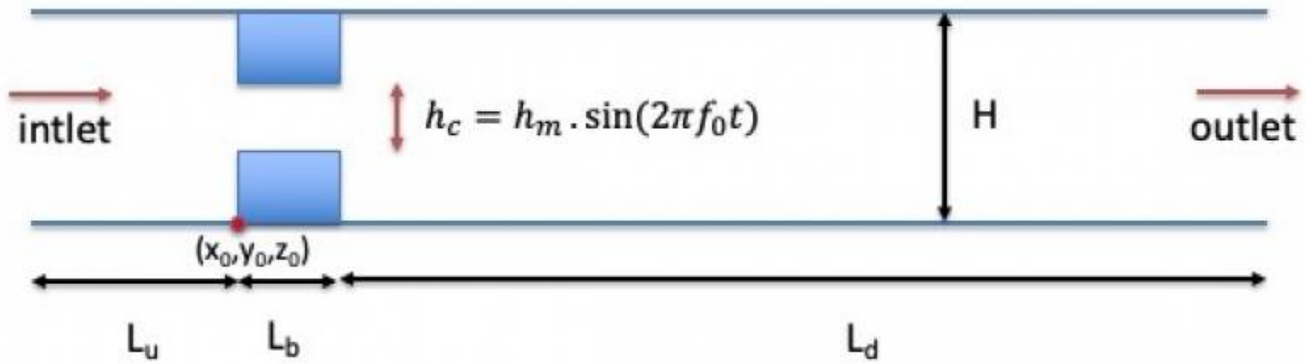

Referential : cartesian geometry

1. axes :

- $x(i)$: downstream direction
- $y(j)$: normal direction
- $z(k)$: spanwise direction

2. origin :

- $x_0 = 0$: upstream edge of the oscillating bodies
- $y_0 = 0$: lower horizontal wall of the duct
- $z_0 = 0$: left vertical wall of the duct

Reference scales

- Density : mass density of the fluid (ρ_0)
- Length : duct height (H)
- Pressure : pressure variation between inlet and outlet, respectively ($\Delta P_0 = P_i - P_o$)
- Velocity : velocity scale ($U_0 = \sqrt{\frac{P_i - P_o}{\rho_0}}$)
- Dynamic viscosity : dynamic viscosity of the fluid (μ_0)
- Body oscillation frequency : f_0 , 3 frequencies are considered over the time range of the simulation ($f_0 = 0.25, f_0 = 0.50, f_0 = 1.0$)
- Reynolds number : $Re_H = \frac{\rho_0 \cdot U_0 \cdot H}{\mu_0} = 1000$
- Strouhal number : $St_0 = \frac{H \cdot f_0}{U_0}$

Non-dimensionalised data

- velocity : $U^* = \frac{U}{U_0}$
- pressure : $P^* = \frac{P}{\Delta P_0}$
- density : $\rho^* = \frac{\rho}{\rho_0} = 1$
- coordinates : $x^* = \frac{x}{H}$, $y^* = \frac{y}{H}$, $z^* = \frac{z}{H}$

Computational domain

1. Domain scope

1. Duct

- Downstream direction (x) : $L^* = 6.0$ (upward duct $L_u = 1$, downward duct

$L_d = 4.5$

- Normal direction (y) : $H^* = 1.0$
- Spanwise direction (z) : $L^* = 1.0$

2. Oscillating bodies (couple of parallelepiped bodies oscillating vertically in opposite phase)

- Upstream edge position : $x_1 = x_2 = 0.0$
- length (x): $L_b = 0.5$
- height (y): Body's heights vary in regard to time t in such a way the clearance h_c between bodies evolves as $h_c = h_m \sin(2\pi f_0 t)$
- width (z) : $L_z = 1.0$
- bodies are modeled with a pseudo-penalisation method (Pasquetti et al., Applied Numerical Mathematics, 2008)

2. Boundary conditions

- Inlet : imposed pressure condition ($P_i = 1$)
- Outlet : imposed pressure condition ($P_o = 0$)
- Wall conditions : usual no-slip conditions on walls

1. Spatial resolution

- Regular grid : $180 \times 80 \times 40$ (576.000 cells)
- About cell-size
 - $\Delta x = 0.0333$ (downstream direction)
 - $\Delta y = 0.0125$ (normal direction)
 - $\Delta z = 0.0250$ (spanwise direction)

[Come back to first page](#)

Data Recording : information about data types

• 3D snapshots

- Instantaneous fields : velocity components in x, y and z directions (U,V,W), the pressure (P) and the phase function related to the body motions (TRACE)
- Recording rate : 0.05 time unit
- Time range from from 0.0 to 100.0 time units
- File name : res_XXXXX_yyyyyyy.d
 - MPI subdomain ID: 0
 - Time ID : from 1 to 2000

[Come back to first page](#)

Database organisation

Data size : ~ 2.3 Go

Main directory : /vol/DATABASE_MECA/DATABASE_JET_TROUGH_OSCILLATING_BODIES_DNS

For more details about files, see the [wiki doc of Sunfluidh](#)

Directories & files

```
/DATASETUP      : ASCII files
  input data file for sunfluidh : input3d.dat
/SNAPSHOTS      : snapshots binary files res_XXXXX_YYYYYYY.d
```

[Come back to first page](#)

From: <https://datasetmeca.lisn.upsaclay.fr/> - **CFD DATABASE**

Permanent link: <https://datasetmeca.lisn.upsaclay.fr/doku.php?id=datasetmeca:jetoscillatingbodies&rev=1606143948>

Last update: **2020/11/23 16:05**

