


3D backward-facing step flow at $Re_H = 6000$

Author : Y. Fraigneau CNRS-LIMSI (yann.fraigneau@limsi.fr)

Date : August 2020

Location : DATABASE_BACKWARDFACINGSTEPFLOW_RE6000_DNS


Simulation type : DNS ([Sunfluidh code](#))

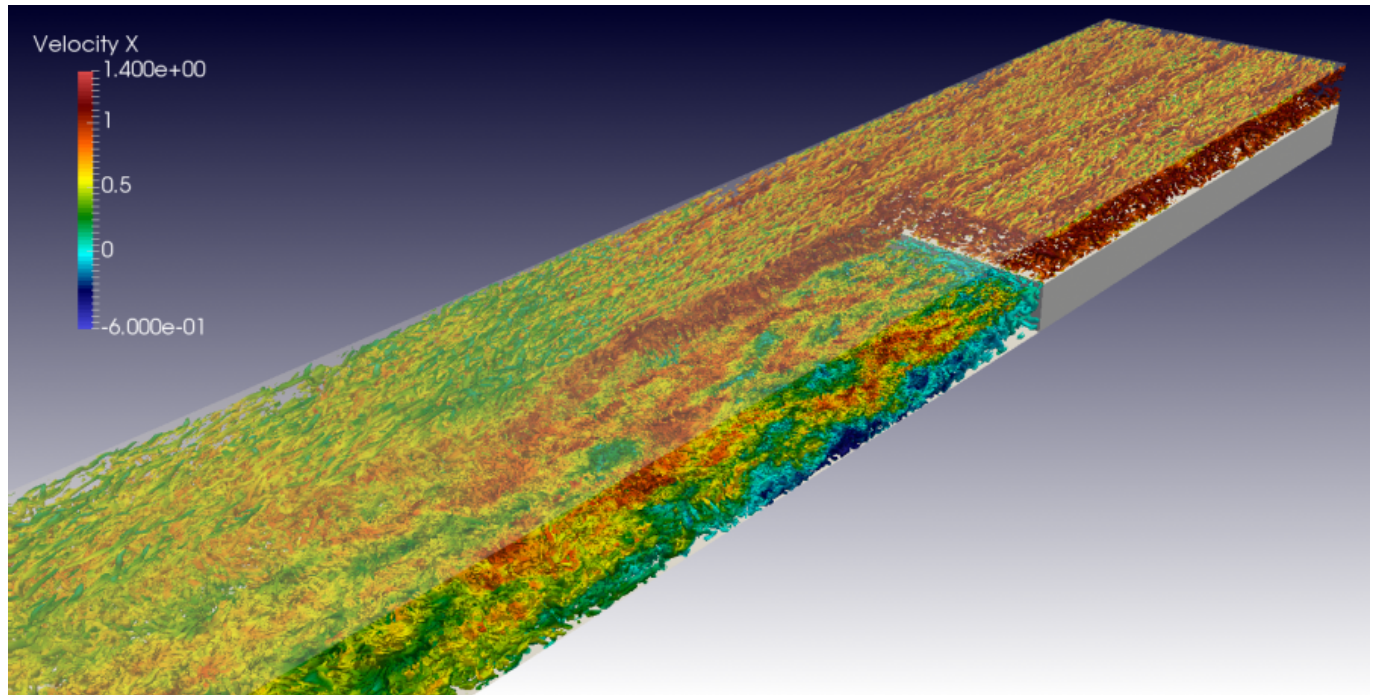

[Come back to previous page](#)

Simulation settings

Sketch

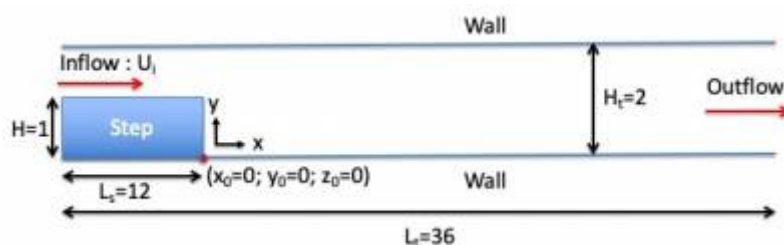

Referential : cartesian geometry

1. axes :

- $x(i)$: downstream direction
- $y(j)$: normal direction
- $z(k)$: spanwise direction

2. origin :

- $x_0 = 0$: the step
- $y_0 = 0$: the bottom wall of the domain
- $z_0 = 0$: the left side of the computational domain

Reference scales

- Density : mass density of the fluid (ρ_0)
- Length : step height (H)
- Velocity : inlet bulk velocity (U_i)
- Dynamic viscosity : dynamic viscosity of the fluid (μ_0)
- Reynolds number : $Re_H = \frac{\rho_0 U_0 H}{\mu_0} = 6000$

Non-dimensionalised data

- velocity : $U^* = \frac{U}{U_i}$
- density : $\rho^* = \frac{\rho}{\rho_0} = 1$
- coordinates : $x^* = \frac{x}{H}$, $y^* = \frac{y}{H}$, $z^* = \frac{z}{H}$

Computational domain

1. Domain scope

- Downstream direction (x) : $L^* = 36.0$
- Normal direction (y) : $H_t^* = 2.0$
- Spanwise direction (z) : $L^* = 2\pi$
- Step position : $L_s^* = 12.0$
- Step height : $H^* = 1$

2. Boundary conditions

- Inlet : Uniform profil at $X_{in}^* = -12.0$
- Outlet : Orlansky's type at $X_{out}^* = 24.0$
- Wall conditions : Top and low walls of the domain
- Periodicity : lateral ends of the domain

3. Domain decomposition (160 MPI subdomains)

- Along the downstream direction :
 - 12 (between the inlet and the outlet, above the step)
 - 8 (between the step and the outlet)
- Along the normal direction : 4
- Along the spanwise direction : 4
- Sketch of domain decomposition in a plan $\{xy\}$ (MPI process distribution (1))
1 1 1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1 1 1
0 0 0 0 1 1 1 1 1 1 1 1
0 0 0 0 1 1 1 1 1 1 1 1

4. Spatial resolution :

- Grid : $128 \times 64 \times 64$ per subdomain (83.886.080 cells over the domain)
- About cell-size
 - $\Delta x_{min}^* = 1.0 \times 10^{-3}$ $\Delta x_{max}^* = 2.456 \times 10^{-2}$ (downstream direction)

- $\Delta y_{\min}^* = 1.1 \times 10^{-3}$ $\Delta y_{\max}^* = 1.653 \times 10^{-2}$ (normal direction)
- $\Delta z_{\min}^* = \Delta z_{\max}^* = 2.4543 \times 10^{-3}$ (spanwise direction)

Data Recording : information about data types

- **Time series from probes** : U,V,W,P (velocity components & pressure)
 - Time step= 0.01
 - Time range : 200.0 to 513.3 time units
 - Locations (In vertical plan at $z=3.14$)
 - $X_i=-4.00$, $X_j= 1.50$, $X_k= 3.14$ 17
 - $X_i=-2.00$, $X_j= 1.50$, $X_k= 3.14$ - MPI Subdomain ID : 25
 - $X_i= 0.10$, $X_j= 1.00$, $X_k= 3.14$ - MPI Subdomain ID : 37
 - $X_i= 4.00$, $X_j= 1.00$, $X_k= 3.14$ - MPI Subdomain ID : 53
 - $X_i= 4.00$, $X_j= 0.01$, $X_k= 3.14$ - MPI Subdomain ID : 49
 - $X_i= 6.00$, $X_j= 1.00$, $X_k= 3.14$ - MPI Subdomain ID : 69
 - $X_i= 6.00$, $X_j= 0.01$, $X_k= 3.14$ - MPI Subdomain ID : 65
 - $X_i= 8.00$, $X_j= 1.00$, $X_k= 3.14$ - MPI Subdomain ID : 69
 - $X_i= 8.00$, $X_j= 0.01$, $X_k= 3.14$ - MPI Subdomain ID : 65
 - $X_i=16.0$, $X_j= 1.00$, $X_k= 3.14$ - MPI Subdomain ID : 117
 - $X_i=16.0$, $X_j= 0.01$, $X_k= 3.14$ - MPI Subdomain ID : 113
 - File name : x_ins_yyyyy.d with x= u,v,w,p and 'yyyyy' the MPI subdomain ID
- **3D snapshots** (instantaneous fields : velocity components U,V,W and pressure : P)
 - Recording rate : 0.1 time units
 - Time range from from 185.3 to 513.3
 - File name : res_xxxxx_yyyyyyy.d (xxxxx : MPI subdomain ID, yyyyyyy : Time ID)
 - MPI subdomain ID: from 0 to 159
 - Time ID : from 186 to 3465
- **Statistics** (fields : $\langle U_i \rangle$, $\langle P \rangle$, $\langle P^2 \rangle$, $\langle U_i U_j \rangle$ i,j : directions x,y,z)
 - Time and space average computation (along the spanwise direction)
 - Time startup = 180.0
 - Time range per file = 10.0
 - Total time range from 180.0 to 510.0
 - file name : rst_xxxxx_yyyyyyy.d (xxxxx : MPI subdomain ID, yyyyyyy : Time ID)
 - MPI subdomain ID : from 0 to 39 (MPI process rank where results about space average computation are stored)
 - Time ID : from 1 to 33

Database organisation

Data size : ~ 4.4 To

Main directory :

/vol/DATABASE_MECA/RESTRICTED_ACCESS/DATABASE_BACKFACINGSTEPFLOW_RE6000_DNS

For more details about files, see the [the wiki doc of Sunfluidh](#)

Directories & files

```
/GRID : contains all ASCII files about grid setup
input data file      : data_meshgen.d
report on grid features : report_meshgen.d
grid files for sunfluidh: maillx.d, mailly.d, maillz.d
check files (ASCII)   : check_mesh_I.d, check_mesh_J.d, check_mesh_K.d
                        (3 columns : indices, cell-face coordinates,
cell size)
/DATASETUP           : ASCII files
input data file for sunfluidh : input3d.dat
data file for MPI subdomain distribution (MPI graphical topology):
data_mpi_subdomain_layout.dat
/TIMESERIES : contains time series recorded over the time range
[200,513.3]
                ASCII files : x_ins_yyyyy.d with x= u,v,w,p
                time series files are sliced in directories CAS-MPI160-n (n
from 121 to 330)
                WARNING : possible underlying of time series for these data
couples :
                        n = (243,244):
                        n = (246,247):
                        n = (259,260):
                        n = (260-261):
                        The directory CAS-MPI160-260 contains 2 groups of
consecutive timeseries files placed in
directories DIR-A and DIR-B
/SNAPSHOTS : snapshots binary files res_xxxxx_yyyyyyy.d
            files stored in archive files : res_yyyyyyy.tar for each
time ID
/STATISTICS : statistics binary files files rst_xxxxx_yyyyyyy.d
            files stored in archive files : rst_z.tar , z is an ID
number
/RESTART_AR : backup/restart archive save.tar at time 513.27
```

[Come back to previous page](#)

From:
<https://datasetmeca.lisn.upsaclay.fr/> - **CFD DATABASE**

Permanent link:
https://datasetmeca.lisn.upsaclay.fr/doku.php?id=datasetmeca:bfsflow_1&rev=1603544434

Last update: **2020/10/24 15:00**

